

TRACK MOUNTED - LINEAR POINTS

C-TRACK - LP H2-8

(available only when ordered with a Cooledge Specialty Illumination Solution)



APPLICATION

- Track mounted linear points - intended for use with magnetic profiles
- 48VDC remote LED power supply is required (not included)
- For indoor use only.

PHOTOMETRIC

- Light Source: LED 11.9W (with PSU = 14W)
- CRI: >90

MECHANICAL

Dimensions:

- Length = 33" (838mm); Width = 3/4" (20mm); Height = 1-1/16" (27mm)
- IP Rating: IP20
- Weight: 1.1lbs (0.50kg)

ELECTRICAL

- Power Supply: Remote 48VDC (not included)
- Input Voltage: 120VAC (60Hz)

Dimming:


- DIM5 = DALI
- MDL = DALI / 0-10V / Push Button via 48V modulator

FINISH COLOR


Add your selection using the following codes:

- B – Black

ACCESSORIES

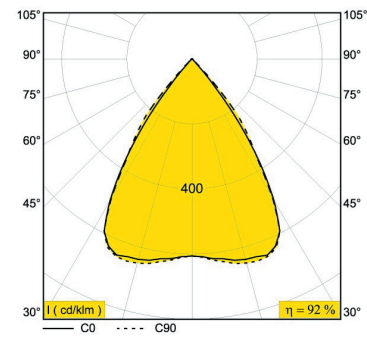

Beam angles available: 67° (FL)

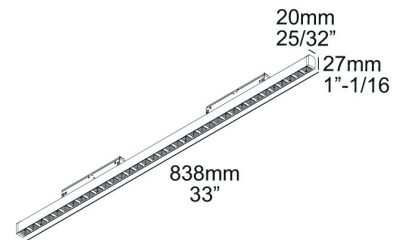

Beam Angle	3000K			3500K		
	Source Lumens	Delivered Lumens	Order Code	Source Lumens	Delivered Lumens	Order Code
67° (FL)	1797	1653	C-6 23381 9320 B (MDL) C-6 23382 9325 B (DIM5)	1753	1613	C-6 23381 9520 B (MDL) C-6 23382 9525 B (DIM5)

TRACK MOUNTED - LINEAR POINTS

C-TRACK - LP H2-11

(available only when ordered with a Cooledge Specialty Illumination Solution)

APPLICATION

- Track mounted linear points - intended for use with magnetic profiles
- 48VDC remote LED power supply is required (not included)
- For indoor use only

PHOTOMETRIC

- Light Source: LED 17W (with PSU = 20W)
- CRI: >90

MECHANICAL

Dimensions:

- Length = 43-7/8" (1114mm); Width = 3/4" (20mm); Height = 1-1/16" (27mm)
- IP Rating: IP20
- Weight: 1.5lbs (0.68kg)

ELECTRICAL

- Power Supply: Remote 48VDC (not included)
- Input Voltage: 120VAC (60Hz)

Dimming:



- DIM5 = DALI
- MDL = DALI / 0-10V / Push Button via 48V modulator

FINISH COLOR

Add your selection using the following codes:

- B – Black

ACCESSORIES

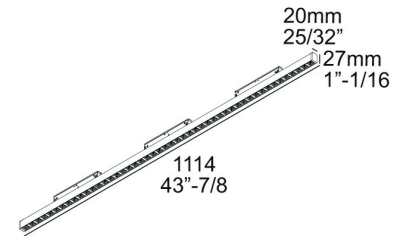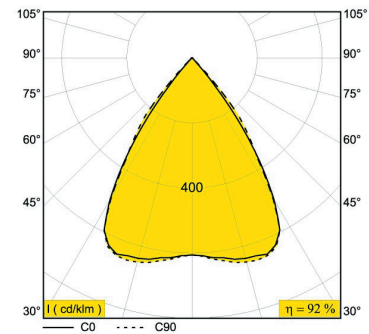

Beam Angle	3000K			3500K		
	Source Lumens	Delivered Lumens	Order Code	Source Lumens	Delivered Lumens	Order Code
67° (FL)	2567	2362	C-6 23383 9320 B (MDL) C-6 23384 9325 B (DIM5)	~2510	~2310	C-6 23383 9520 B (MDL) C-6 23384 9525 B (DIM5)